


Series *DP300/3000/5000*

3 · 5 Port Air Pilot Valve




- COMPACT SIZE AND LIGHT WEIGHT
 - 0.63 inch Width (Series UDP300, UDP3000)
 - 1.26 inch Width (Series UDP5000)
- LARGE FLOW CAPACITY
 - Cv. 1.0 - NPT 1/4" (Series UDP300, UDP3000)
 - Cv. 3.2 - NPT 1/2" (Series UDP5000)

Symbol

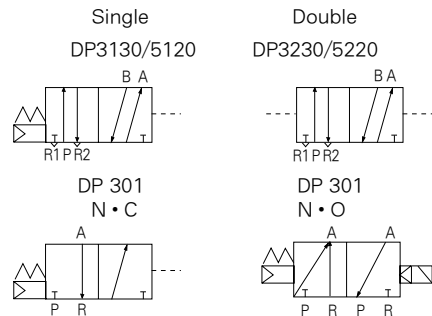


How to Order

DP3000




- | | |
|--|---|
| 1 Series DP3000
Blank : Metric (PT)
U : NPT (UNF) | 4 Body Specifications
0 : Standard |
| 2 Type of Actuation
1 : Single Pilot type
2 : Double Pilot type | 5 Thread
Blank : Rc (PT)
G : Rc (PF) |
| 3 Body Type
3 : For 30 type Manifold
(Body Ported) | 6 Port Size (P, A, B)
01 : 1/8"
02 : 1/4"
* Exhaust Port is only 1/8" |

DP5000



- | | |
|--|--|
| 1 Series DP5000
Blank : Metric (PT)
U : NPT (UNF) | 4 Body Specifications
0 : Standard |
| 2 Type of actuation
1 : Single pilot type
2 : Double pilot type | 5 Thread
Blank : Rc (PT)
G : Rc (PF) |
| 3 Body Type
2 : For 20 type Manifold
(Body Ported) | 6 Port Size (P, A, B)
03 : 3/8"
04 : 1/2"
* Exhaust Port is only |

DP300



- | | | | | | |
|---|--|---------------------------------------|---|---|--|
| 1 Series DP300
Blank : Metric (PT)
U : NPT (UNF) | 2 Type of Actuation
0 : Normally Closed /
Normally Open | 3 Body Type
1 : Body Ported | 4 Thread
Blank : Rc (PT)
G : Rc (PF) | 5 Port size (P, A, R)
01 : 1/8"
02 : 1/4"
* Exhaust port is only 1/8" | 6 Body Type
A : N.C
B : N.O |
|---|--|---------------------------------------|---|---|--|

DW

DR100

RS

DV1000 ·
3000 · 4000

DS300

DS3000

DS5000

DS2000

DX2R

DP300 ·
3000 · 5000

DS6000

DX2

DM

DH

DT220

DC

Specifications

Fluid	Air		
Operating Pressure Range	2 Position	Single	0.15~0.9 MPa(21~128PSI)
		Double	0.1~0.9 Mpa(14~128PSI)
Ambient and Fluid Temperature	MAX. 60° C(140° F)		
Pilot Pressure Range	2 Position	Single	^(Note2) 0.16~0.9 Mpa(24~128PSI)
		Double	0.1~0.9 Mpa(14~128PSI)
Lubrication	Not required		
Impact/Vibration Resistance	30G / 5G (8.3 ~ 2000Hz)		
Mounting Position	Free		
(Note 1) Effective Orifice mm^2 (Cv factor)	1/8"	14 (1.0)	
	1/4"	17.5 (1.0)	
	3/8"	48 (2.7)	
	1/2"	56 (3.1)	
Pilot Port Size	Rc(PT) 1/8 Common use		

(Note 1) Cv-Capacity Co-efficients(Flow Factors)

(Note 2) The minimum pressure for PILOT should be higher than "A"

P : Supply pressure. A : $0.4 \times P + 14.224$ (PSI)

* $\text{cm}^2 = 0.0016 \text{ in}^2$


Model

Piping	Type	Position/Solenoid	Port size	Effective orifice mm^2 (Cv factor)	
				1/8"	1/4"
Body Ported	DP300	2 Position Single	1/8" 1/4"	19.2(1.07)	22(1.2)
	DP3130	2 Position Single	1/8"	14(0.8)	18(1.0)
	DP3230	2 Position Double	1/4"	14(0.8)	18(1.0)
	DP5120	2 Position Single	3/8"	48(2.8)	58(3.2)
	DP5220	2 Position Double	1/2"	48(2.8)	56(3.2)

3 Port

DP 301-01
02

inch(mm)

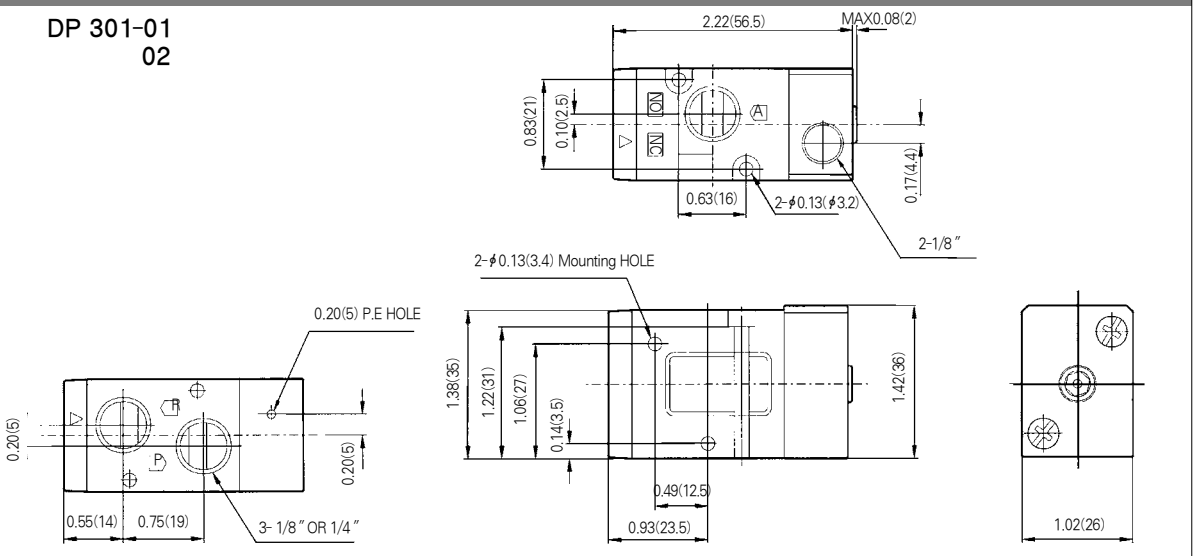


Series DP300/3000/5000


5 Port/2 Position Single, Double

inch(mm)

DP3130-01
02

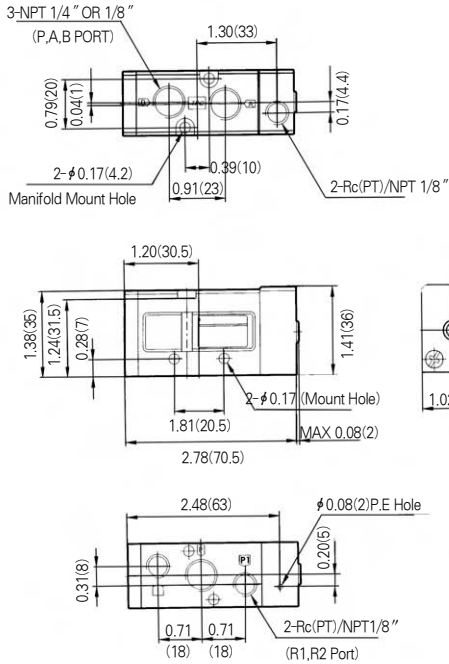


DP3230

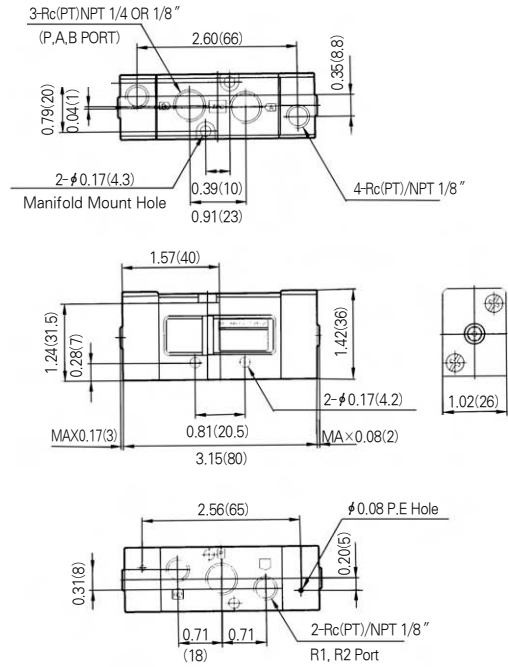

5 Port/2 Position Single, Double

inch(mm)

DP5120-03
04

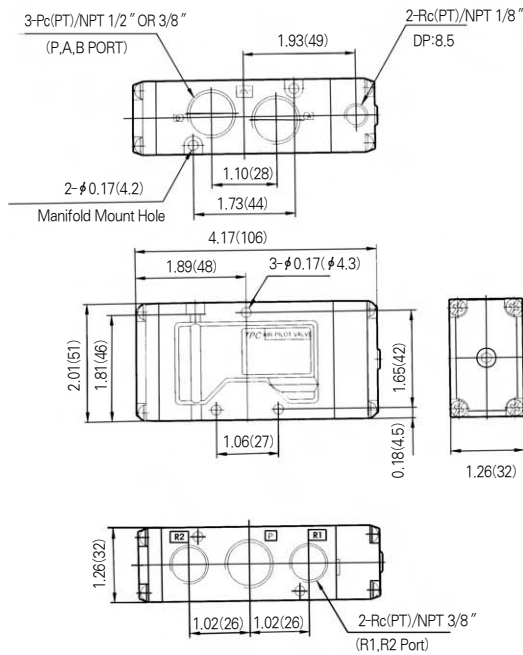

DP5220

